

Bamboo folding table

Cup-holder and tri-fold tabletops

A practical surface for life on the road.



Cup-holder version shown in a parked van.

Natural bamboo

Warm grain with a protective clear finish.

Folding panels

Open for use, then fold for a smaller footprint.

Two versions

Choose cup holders or a tri-fold tabletop.

Tabletop only

Works with Lagun mounts. Mount sold separately.

Table support, mounting plate and fasteners sold separately.

Know your tabletop

The steps apply to either version. Use a compatible table support and mounting plate.

Cup-holder version



Two removable, reversible metal inserts.
Fit from either face of the cup-holder panel.
One main panel and a folding panel.

Tri-fold version



A wide center panel with two folding sides.
Underside shown above.

Gather these parts and tools

- ☐ Compatible table support, its mounting plate, and approved fasteners.
- ☐ Soft cloth, tape measure, pencil, and a driver for the fastener heads.
- ☐ If drilling is required: a drill, suitable wood pilot bit, and depth stop.

CHECK YOUR MOUNTING SYSTEM FIRST

Confirm plate size, screw type, screw length, and drilling depth with the mount supplier. Measure the actual bamboo thickness before choosing screws.

Reversible cup holders

The removable metal inserts fit from either face of the cup-holder panel.



Choose your working face first

Choose the tabletop orientation before fitting the mounting plate.

Lift out the inserts

Empty the tabletop. Remove cups and lift out both metal inserts before changing orientation.

Refit from the top

Refit from the face you will use, with the cup openings facing up. Check both inserts are fully seated.

Cup-holder version only. Keep the cup openings facing up.

Plan the fit before drilling

Work with the van parked and the tabletop empty.

01 Check the space

Hold the empty top at your chosen table height. Check the space with every panel open and folded.

Keep the aisle, seat movement, belt buckles and vehicle controls clear.

Secure the table support using its supplier's installation instructions before adding the top.



Finished setup shown for placement reference.

02 Position the plate


Place the top face down on a soft cloth. Dry-fit the plate entirely within one solid panel.

Tri-fold: use the wide center panel.

Cup-holder: use a main panel, clear of the cup openings.

Keep the plate clear of hinges and seams. Fold the panels by hand to check clearance.


TRI-FOLD UNDERSIDE

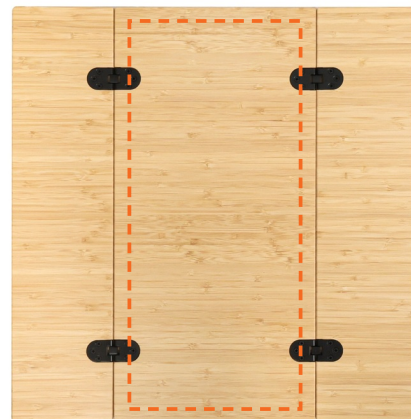

Dashed outline identifies the center panel, not a plate size or hole pattern.

Attach the mounting plate

Confirm the fastener and pilot-hole instructions for your chosen mount before drilling.

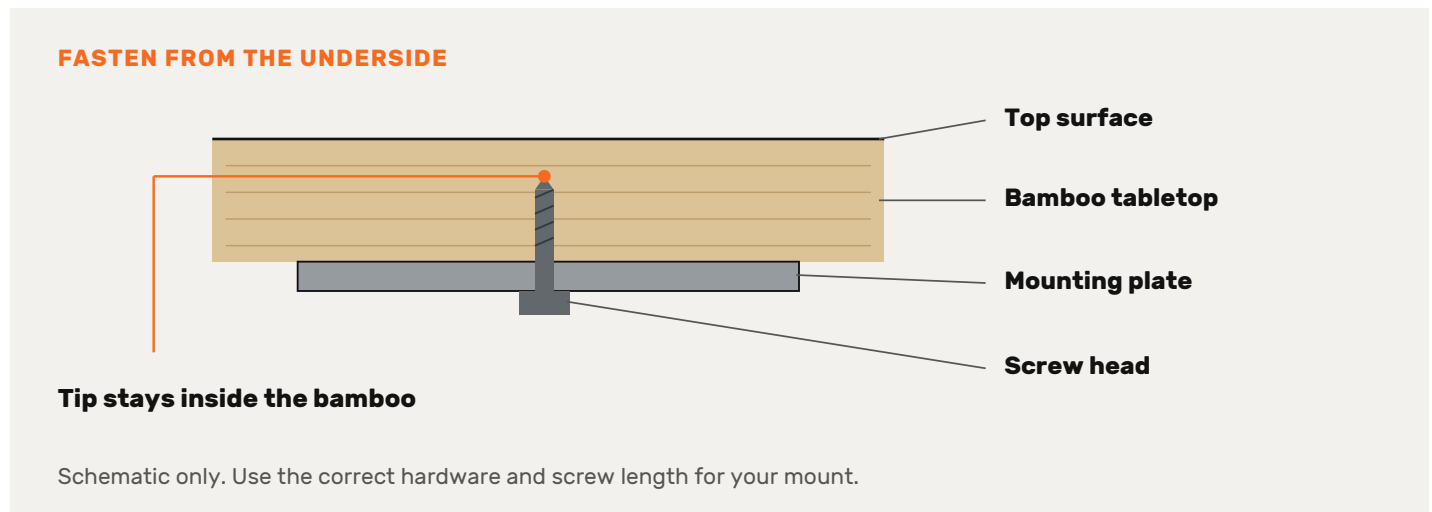

03 Mark and drill

Use the plate as a template. Mark the hole centers on the underside.

Measure the bamboo thickness at these points. Choose approved screws and a pilot bit for that thickness.

Set a depth stop so the pilot holes stay inside the bamboo. Drill only if required by your mounting system.

04 Fasten the plate

Position the plate over the marks. Fit every required fastener, tightening evenly with a hand tool.

Keep the plate flat and secure. Do not overtighten, split the bamboo or let a screw tip reach the top surface.

Recheck that the panels fold freely and the fixings stay clear of the hinges.

No confirmed screw size or drilling depth? Ask Kei Project before drilling.

Attach, unfold and check

Keep the tabletop empty while you connect it to the support.

05 Connect to the support

Connect the tabletop plate to the table arm using the mount supplier's instructions. Support the top until the connection is secure.

Set the height and position. Tighten the mount's locking handles as directed.



Parked use shown.

06 Open the panels

Unfold the panels gently to the flat working position. Keep fingers away from the hinges.

The cup-holder inserts are removable and reversible. Fit them from the upward-facing side, openings facing up, and seat them fully. See page 3 for both orientations.



Fit the removable cup-holder inserts.

CHECK BEFORE USE

The top must be level, the mount locked, and all fixings secure. Keep within the confirmed load limits of the tabletop and support. Do not sit, stand or lean on the table.

Pack away and care

Use the table while parked. Secure it before every journey.



Cup-holder version folded



Tri-fold version folded

Clear and fold

Remove cups and loose items. Fold the panels gently. Remove the metal inserts if needed for clearance.

Secure for travel

Lock or remove and stow the table as directed by your mount supplier. Secure loose inserts. Keep seats, the aisle and controls clear.

Care for bamboo

Wipe spills promptly with a soft, damp cloth. Dry after cleaning. Do not soak the tabletop. Use a protective mat for hot cookware.

Need help with mounting?

Send us a photo of your tabletop underside and chosen mount. Ask Kei Project to confirm plate fit and fasteners if anything is unclear before drilling.



info@keiproject.com

+1 626 560 0969 | keiproject.com

PRODUCT DETAILS